



2650-443

INSTALLATION INSTRUCTIONS

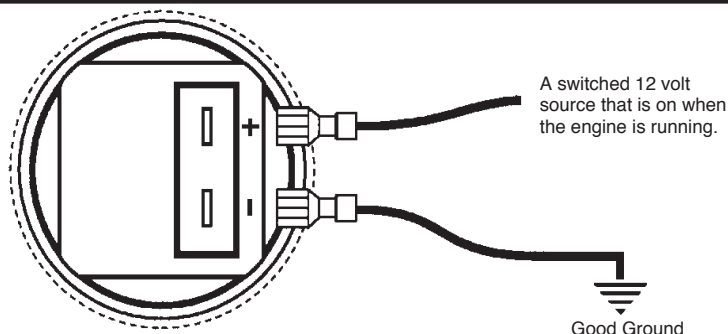

2" ELECTRICAL HOURMETER

MODELS 2587 & 2633

**INSTALLATION**

1. Disconnect negative (-) battery cable.
2. Mount gauge into instrument panel using mounting bracket provided.
3. Using 18 gauge wire with 1/4" female spade terminal, attach spade to the negative (-) terminal on back of gauge and the opposite end to a good ground.
4. Attach second length of wire to the positive (+) terminal on gauge and opposite end to a switched 12V power source that is on when the engine is running.
5. Reconnect negative (-) battery cable.
6. After starting engine, check wiring and connections for hot spots and be prepared to shut off the engine **immediately** if detected and correct any wiring errors.

1/4" Female Spade
Terminals
(not provided)

**CAUTION!**

As a safety precaution the Red wire of this product should be fused before connecting it to the positive (+) side of the 12V DC battery. We recommend using a 4 Amp, 3AG fast-acting type cartridge fuse (Littlefuse® # 312 004 or an equivalent) inline with the Red wire of our product.

SERVICE

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. If you need it back immediately, mark the outside of the box "RUSH REPAIR" and Auto Meter will service the product within two days after receiving it. (\$5.00 charge will be added to the cost of "RUSH REPAIR".) If you are sending product back for warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

12 MONTH LIMITED WARRANTY

The manufacturer warrants to the consumer that this product will be free from defects in materials and workmanship for a period of twelve (12) months from the date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at the manufacturer's option to the consumer, when determined by the manufacturer that the product failed because of defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the instrument and the necessary labor done by the manufacturer to affect the repair or replacement of the instrument. In no event shall this warranty exceed the original purchase price of the instrument, nor shall the manufacturer be responsible for special, incidental or consequential damages or costs incurred due to failure of this product. Warranty claims to the manufacturer must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the meter seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. The manufacturer disclaims any liability for consequential damages due to breach of any written or implied warranty on all products made by the manufacturer.

FOR SERVICE SEND TO: AUTO METER PRODUCTS, INC. 413 W. Elm St., Sycamore, IL 60178 (815) 899-0801



2650-443

INSTALLATION INSTRUCTIONS

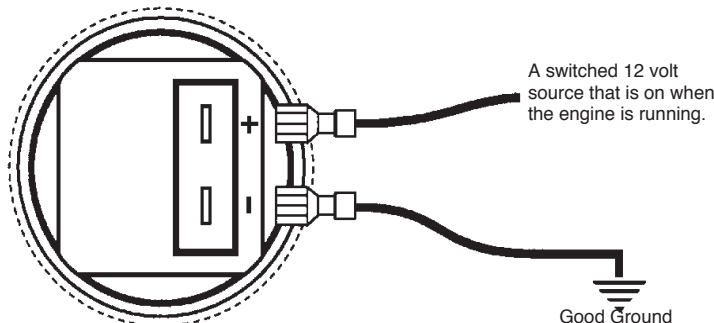

2" ELECTRICAL HOURMETER

MODELS 2587 & 2633

**INSTALLATION**

1. Disconnect negative (-) battery cable.
2. Mount gauge into instrument panel using mounting bracket provided.
3. Using 18 gauge wire with 1/4" female spade terminal, attach spade to the negative (-) terminal on back of gauge and the opposite end to a good ground.
4. Attach second length of wire to the positive (+) terminal on gauge and opposite end to a switched 12V power source that is on when the engine is running.
5. Reconnect negative (-) battery cable.
6. After starting engine, check wiring and connections for hot spots and be prepared to shut off the engine **immediately** if detected and correct any wiring errors.

1/4" Female Spade
Terminals
(not provided)

**CAUTION!**

As a safety precaution the Red wire of this product should be fused before connecting it to the positive (+) side of the 12V DC battery. We recommend using a 4 Amp, 3AG fast-acting type cartridge fuse (Littlefuse® # 312 004 or an equivalent) inline with the Red wire of our product.

SERVICE

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. If you need it back immediately, mark the outside of the box "RUSH REPAIR" and Auto Meter will service the product within two days after receiving it. (\$5.00 charge will be added to the cost of "RUSH REPAIR".) If you are sending product back for warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

12 MONTH LIMITED WARRANTY

The manufacturer warrants to the consumer that this product will be free from defects in materials and workmanship for a period of twelve (12) months from the date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at the manufacturer's option to the consumer, when determined by the manufacturer that the product failed because of defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the instrument and the necessary labor done by the manufacturer to affect the repair or replacement of the instrument. In no event shall this warranty exceed the original purchase price of the instrument, nor shall the manufacturer be responsible for special, incidental or consequential damages or costs incurred due to failure of this product. Warranty claims to the manufacturer must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the meter seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. The manufacturer disclaims any liability for consequential damages due to breach of any written or implied warranty on all products made by the manufacturer.

FOR SERVICE SEND TO: AUTO METER PRODUCTS, INC. 413 W. Elm St., Sycamore, IL 60178 (815) 899-0801