


SUPER VICTOR DRY EFI DIRECT PORT PLUMB KIT JET MAP

CATALOG #71810
INSTALLATION INSTRUCTIONS

Please read both your DIRECT PORT INSTRUCTION MANUAL and this JET MAP insert before installing your Edelbrock Nitrous System. If you have any questions or comments, please feel free to contact our **Technical Hotline at: 1-800-416-8628** from 7a.m.-5p.m., Monday through Friday, Pacific Time or e-mail us at **Edelbrock@Edelbrock.com.** Please fill out and mail your warranty card.

BILL OF MATERIALS

Qty.	Description	Qty.	Description
2	Victor Pro Nitrous Solenoid	□ 8	Nitrous Jet
2	Distribution Block	□ 8	Compression Fitting
□ 8	Dry EFI Nozzle	□ 2	Union Fitting
□ 8	3/16" Tubing	1	Blue 6AN Y-Fitting
□ 8	Tube Sleeve	□ 2	6AN Filter Fitting
□ 8	Blue Tube Nut	□ 2	6AN 15in. Hose

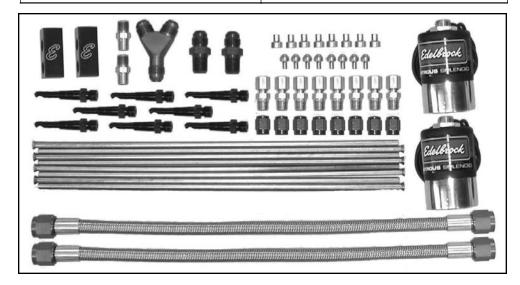

Jet Map

Approx. HP Gain	Nitrous Jet	Sugg. Timing Retard	Fuel Required (lb./hr.)
250 HP	28	10°+	122-147
300 HP	32	12°+	151-181

The jet map shown above shows the approximate horsepower gain for each nitrous jet size (maintaining a bottle pressure of approximately 925 psi), based on the correct timing retard and additional fuel required to flow through your injectors. The additional fuel flow is crucial because if the additional fuel flow is not enough, you will experience a lean condition which could cause serious engine damage. When tuning your system, you should start with a rich condition and slowly lean the nitrous tune-up out to the desired performance level. Always remember, a slightly rich nitrous/fuel ratio will extend the life of the engine drastically, but only slightly reduce the performance.

Edelbrock Corporation • 2700 California St. • Torrance • CA 90503

Tech Line: 800-416-8628 Office: 310-781-2222

E-Mail: Edelbrock@Edelbrock.com