

MSD INSTALLATION INSTRUCTIONS

E-Z Adjust Crank Trigger Kit, PN 8605

Parts Included:

1 – Socket Head Cap Screw, 1/4-20 x 3.5"
2 – 10-32 Set Screws
1 – Threaded Hex Mount
1 – Unthreaded Hex Mount

1 – Mounting Plate
1 – Anchor Block
1 – Shoulder Screw, 10-24 x .500"
1 – Button Head Cap Screw, 10-24 x .250"

Note: The E-Z Adjust Kit will fit most popular MSD Flying Magnet Crank Trigger Brackets. It will not work with the PN 8600, 6.25" SB Chevy Kit or the PN 8630, Buick V6 kit.

The E-Z Adjust provides a precise way to easily make incremental timing adjustments. The kit is supplied with two hex mounts, one threaded, the other is not. The location of the mounts determines whether the adjusting screw will be accessible from above or below the vehicle. It will be easier to remove the pickup bracket assembly from the engine to install the Adjuster. Also, determine if you prefer to adjust the timing from above or below. Figure 1 shows the complete assembly with the adjustment made from above.

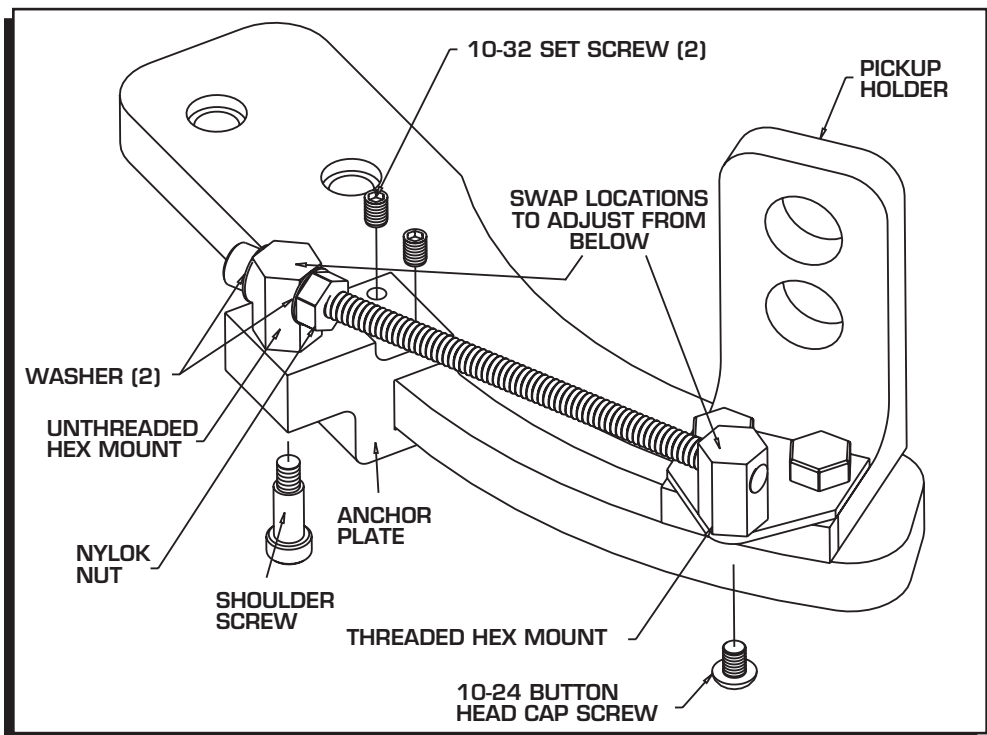


Figure 1 Assembling the E-Z Adjust Crank Trigger Kit.

1. Assemble the adjusting screw by installing a washer, then running it through the unthreaded hex mount. Install the other washer followed by the Nylok nut and run it up until the assembly is snug.
2. Install the hex mount with the adjusting screw to the anchor plate using the Button Head Cap Screw.
3. Remove the pickup holder and install the mounting plate.
4. Install the threaded hex mount to the end of the adjusting screw assembly. Secure the mount to the mounting plate on the pickup holder with the Shoulder Screw.
5. Position the anchor plate to the crank trigger bracket. Its placement can be adjusted by moving adjusting screw. Once the placement is set, install the two set-screws to hold it in place. Blue Loc-Tite is recommended on the set screws.

[illegible]

When returning the unit for repair, leave all wires at the length in which you have them installed. Be sure to include a detailed account of any problems experienced, and what components and accessories are installed on the vehicle. The repaired unit will be returned as soon as possible using Ground shipping methods (ground shipping is covered by warranty). For more information, call MSD at (915) 855-7123. MSD technicians are available from 7:00 a.m. to 5:00 p.m. Monday - Friday (mountain time).

*Intended normal use means that this item is being used as was originally intended and for the original application as sold by MSD. Any modifications to this item or if it is used on an application other than what MSD markets the product, the warranty will be void. It is the sole responsibility of the customer to determine that this item will work for the application they are intending. MSD will accept no liability for custom applications.