


INSTRUCTIONS

#911-21001

12V Quartz Halogen Adapter Kit

- 1) Remove any existing socket from the center of your reflector.
- 2) Punch, drill, or file the existing hole to 1" diameter.
- 3) Install the new Quartz Halogen socket with the press nut on the back side. Apply a bead of silicone between the socket and the reflector.
- 4) Connect wires as shown in the drawing below.
- 5) Do not touch the bulb with your bare fingers. Clean glass bulb with Isopropyl Alcohol.

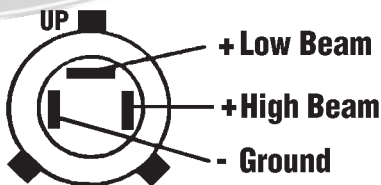


Speedway Motors, Inc.
Lincoln, NE 402-323-3200
www.speedwaymotors.com

INSTRUCTIONS

#911-21001

12V Quartz Halogen Adapter Kit

- 1) Remove any existing socket from the center of your reflector.
- 2) Punch, drill, or file the existing hole to 1" diameter.
- 3) Install the new Quartz Halogen socket with the press nut on the back side. Apply a bead of silicone between the socket and the reflector.
- 4) Connect wires as shown in the drawing below.
- 5) Do not touch the bulb with your bare fingers. Clean glass bulb with Isopropyl Alcohol.

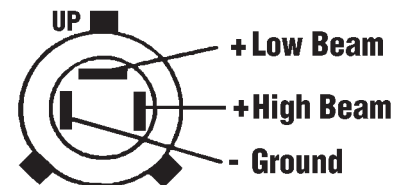


Speedway Motors, Inc.
Lincoln, NE 402-323-3200
www.speedwaymotors.com

INSTRUCTIONS

#911-21001

12V Quartz Halogen Adapter Kit

- 1) Remove any existing socket from the center of your reflector.
- 2) Punch, drill, or file the existing hole to 1" diameter.
- 3) Install the new Quartz Halogen socket with the press nut on the back side. Apply a bead of silicone between the socket and the reflector.
- 4) Connect wires as shown in the drawing below.
- 5) Do not touch the bulb with your bare fingers. Clean glass bulb with Isopropyl Alcohol.

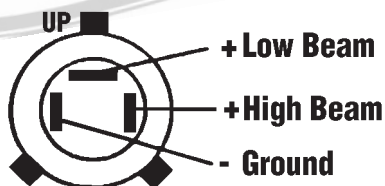


Speedway Motors, Inc.
Lincoln, NE 402-323-3200
www.speedwaymotors.com

INSTRUCTIONS

#911-21001

12V Quartz Halogen Adapter Kit

- 1) Remove any existing socket from the center of your reflector.
- 2) Punch, drill, or file the existing hole to 1" diameter.
- 3) Install the new Quartz Halogen socket with the press nut on the back side. Apply a bead of silicone between the socket and the reflector.
- 4) Connect wires as shown in the drawing below.
- 5) Do not touch the bulb with your bare fingers. Clean glass bulb with Isopropyl Alcohol.

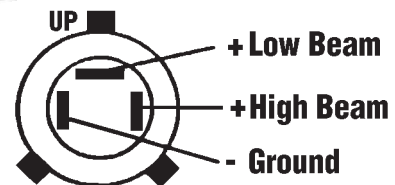

Speedway Motors, Inc.
Lincoln, NE 402-323-3200
www.speedwaymotors.com