



QUALITY... PLAIN & SIMPLE®

### Connector Cable Installation Instructions

Part # EC-8001U or EC-8001HT (For Under-the-Dash Foot Operated E-Brake)

#### General Installation Notes:

Please read instructions completely before beginning installation. If you have any questions please don't hesitate to call.

**NOTE:** Before starting installation, set parking brake and scotch vehicle to avoid accidental movement of the vehicle. Disconnect battery cable before starting installation.

# Connector Cable Installation Instructions

Part# EC-8001U or EC-8001HT (For Under-the-Dash Foot Operated Emergency Brake)

Building American Quality... With A Lifetime Warranty!®

10924 Murdock Dr. • Knoxville, TN 37932

TOLL FREE 1-877-469-7440 • (865) 966-2269 • FAX (865) 671-1999 • tech@lokar.com • www.lokar.com

### Connector Cable Installation

**Step 1:** Install outer housing to foot brake main frame with E-Clip as shown in Figure 1.

**Step 2:** Run housing back to rear cables. If you are using a Lokar Universal Rear Emergency Brake Cable Kit, mount connector cable bracket 9 1/2" from rear cable adjuster as shown in Figure 2.

**Step 3:** Run inner cable from foot brake, using ball end at foot brake. Make sure foot brake is in the full release position.

**Step 4:** Be sure to adjust the adjusters all the way in when connecting cables as shown in Figure 2.

**Step 5:** Adjust all cables as needed to remove any slack.

Figure 1

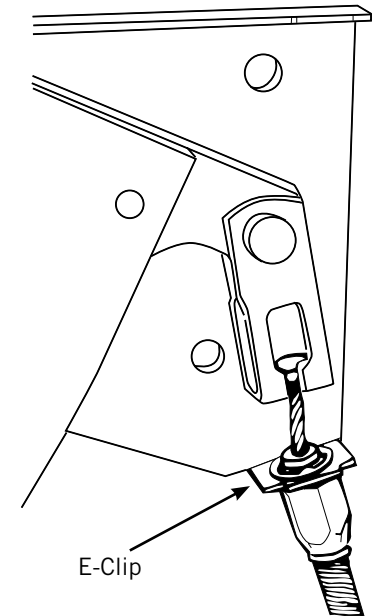


Figure 2

