

# INSTALLATION INSTRUCTIONS


## Jeep Dash Pod Installation

For 2018+ Jeep JL Wrangler



Designed for rectangular rocker switches (\*Not included) that fit 0.96" x 1.9" cutouts and Mini CBs (\*Not included) that are no wider than 4.5" x 1.75"

1. Disconnect the Negative battery cable.
2. Remove the rubber tray liner.
3. Pre-wire the switches. Tip: Using a small piece of masking tape to label the wires will help make it easier to finish the wiring later.
4. Make sure that the rubber gasket included with most switches is installed; this will help keep the switches from rattling.
5. Run the wires through the corresponding openings and push the switches in until they "click" in place.
6. Attach 2 pieces of the included 3M™ Dual-Lock™ to the top of CB by pushing firmly in a location that will best secure the CB. Tip: cleaning the surface that the 3M™ Dual-Lock™ will be adhered to with alcohol beforehand and letting it dry will help adhesion.
7. Click in a piece of 3M™ Dual-Lock™ into each of the 2 previously installed pieces, making sure they are fully seated.
8. Remove the backing tape from these 2 pieces of 3M™ Dual-Lock™ and carefully slide the CB into the large rectangular cutout, then position the CB where desired. Then place the pod on a flat surface and push firmly on the bottom of the CB to adhere. Tip: it might be easier to insert the CB from the bottom and push CB through the cutout from back if the height of the 3M™ Dual-Lock™ pieces interfere.
9. Attach wires and antenna to the CB and route the switch wires to your desired location.
10. Insert the bottom making sure the "grill" portion is under the CB. The "grill" allows CBs that have a bottom firing speaker to still be heard.
11. Attach a piece of the included 3M™ Dual-Lock™ to the underneath of the cubby, make sure to push firmly.
12. Click in a piece of 3M™ Dual-Lock™ into the installed piece, making sure it is fully seated. Tip: cleaning the surface that 3M™ Dual-Lock™ will be adhered to with alcohol beforehand and letting it dry will help adhesion.
13. Make sure the bottom of the dash tray has been cleared of debris and cleaned with alcohol.
14. Remove the backing tape from these 2 pieces of 3M™ Dual-Lock™ and carefully slide the entire pod into the dash tray's large rectangular section. Make sure to push the bottom of the cubby firmly to best adhere the 3M™ Dual-Lock™.
15. Finish wiring the switches and CB per the instruction included by their manufacturer.
16. Reconnect the Negative battery cable.

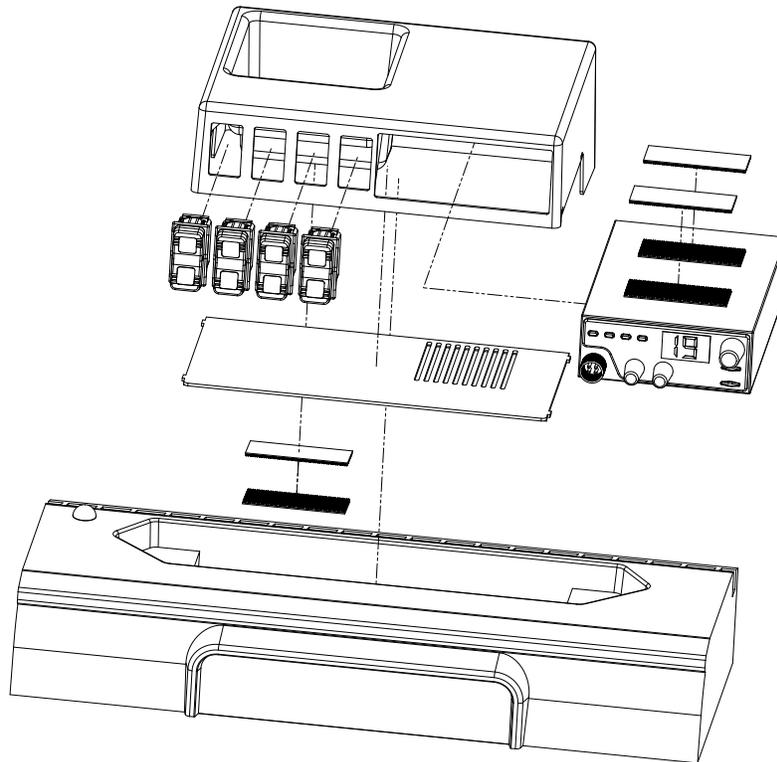

### AutoMeter One Year Limited Warranty

AutoMeter Products, Inc. warrants to the consumer that all AutoMeter High Performance products purchased from an Authorized AutoMeter Reseller will be free from defects in material and workmanship for a period of twelve (12) months from date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at AutoMeter's option, when determined by AutoMeter that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the AutoMeter High Performance product and the necessary labor done by AutoMeter to effect the repair or replacement of the AutoMeter High Performance product. In no event shall AutoMeter's cost to repair or replace an AutoMeter High Performance Product under this warranty exceed the original purchase price of the AutoMeter High Performance Product. Nor shall AutoMeter Products, Inc. be responsible for special, incidental or consequential damages or costs incurred due to the failure of an AutoMeter High Performance Product. This warranty applies only to the original purchaser of the AutoMeter High Performance Product and is non-transferable. This warranty also applies only to AutoMeter High Performance Products purchased from an Authorized AutoMeter Reseller. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the instrument seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. AutoMeter disclaims any liability for consequential damages due to the breach of any written or implied warranty on all products manufactured by AutoMeter Products, Inc. For a comprehensive listing of Un-Authorized AutoMeter Resellers please visit [www.autometer.com/autometerlocator/index/unauthorized](http://www.autometer.com/autometerlocator/index/unauthorized).