


Connect gauge to the last gauge in the series. (Multi gauge hook-up)

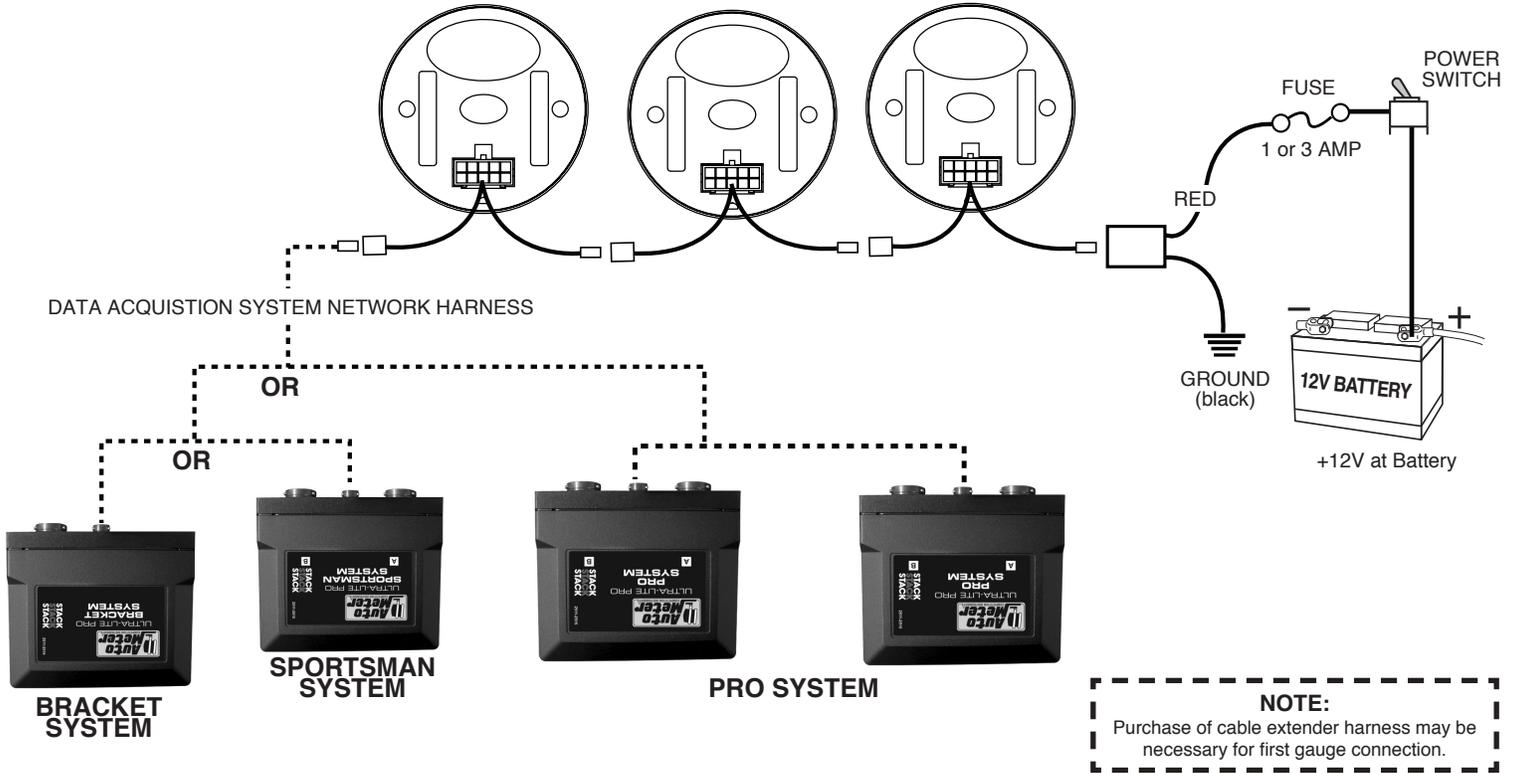

Installation

1. Check that you have all parts required for installation.
2. Disconnect the negative (-) battery cable.
3. 2" Gauge mounts in a 2 $\frac{1}{16}$ " hole, 2 $\frac{5}{8}$ " gauge mounts in a 2 $\frac{5}{8}$ " and 3 $\frac{3}{8}$ " Tach mounts in a 3 $\frac{3}{8}$ " hole. If mounting in-dash, use the supplied threaded studs, mounting bracket and hardware to secure gauge to dash. Thread short end of threaded stud into the two holes in the back of the case until the hex flat is seated against the back of the case. **DO NOT OVER-TIGHTEN.**
4. If the gauge is the first gauge in the series, plug the female connector on the gauge into the male connector from the data acquisition system. Plug the male connector on the gauge into the female connector for the data acquisition system signal termination (supplied with the system) and connect the red wire to a switched, fused +12V source and the black wire to a good engine ground. If adding the gauge to an existing network of gauges, connect the male and female connectors in between the data acquisition system connector and the signal termination connector or the existing gauges.
5. Reconnect negative (-) battery cable.

SERVICE

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. If you need it back immediately mark the outside of the box "RUSH REPAIR," and Auto Meter will service product within two days after receiving it. (\$10.00 charge will be added to the cost of "RUSH REPAIR.") If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

12 MONTH LIMITED WARRANTY

Auto Meter Products, Inc. warrants to the consumer that all Auto Meter High Performance products will be free from defects in material and workmanship for a period of twelve (12) months from date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at Auto Meter's option to the consumer, when it is determined by Auto Meter Products, Inc. that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter instruments. In no event shall this warranty exceed the original purchase price of the Auto Meter instruments nor shall Auto Meter Products, Inc. be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the instrument seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Products, Inc. disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter.

FOR SERVICE SEND TO: **AUTO METER PRODUCTS, INC.** 413 W. Elm St., Sycamore, IL 60178 USA (866) 248-6356

Email us at service@autometer.com