



Installation Instructions

Part Number 33-2126

This filter fits: **See current K&N catalog for complete listing**

FREE K&N DECAL To register your warranty, please see us online at knfilters.com/register. FREE K&N DECAL

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter is a direct replacement for the stock air filter, and no modifications will be required. However the following procedure MUST be followed to ensure a proper fit and seal of the K&N Air Filter.

INSTALLATION

- 1) Remove the intake tube from the airbox lid by loosening the hose clamp.
- 2) Unfasten the four clips that hold the airbox lid to the base.
- 3) Remove the stock air filter.
- 4) Rotate the airbox lid so you can see the bottom of it making sure not to break the wires on the airbox sensors.
- 5) Wipe any dirt or dust from the inside of the lid and base. The airbox must be clean and dry so that the gasket will stick to it.
- 6) Apply the self-sticking gasket around the groove on the airbox lid. (Fig. 1)
- 7) Install the K&N Air Filter into the airbox base.
- 8) Place the airbox lid onto the K&N Air Filter. Before you re-fasten the four clips, you must gently slide the lid of the airbox side to side while applying light downward pressure. (Fig. 2) You should feel the air filter pop into the groove on the lid. When the filter is seated correctly to the airbox, the lid will no longer move from side to side.
- 9) Re-fasten the four airbox clips.
- 10) Re-install the air intake tube and tighten the hose clamp.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

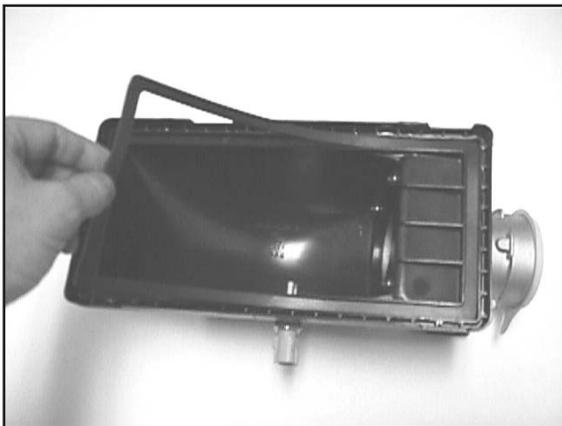


Fig. 1

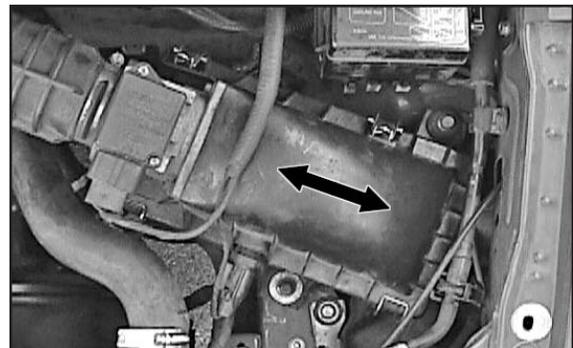


Fig. 2