



INSTALLATION INSTRUCTIONS

Part Number 33-2170

This filter fits: **See current K&N® catalog for complete listing**

* FREE K&N® decal To register your warranty, please see us online at knfilters.com/register. FREE K&N® decal *

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter is a direct replacement for the stock air filter, and no modifications will be required. However the following procedure MUST be followed to ensure a proper fit and seal of the K&N® air filter.

INSTALLATION

1. Remove the stock air filter from the air box housing.
2. Place the plastic cage onto the air filter, making sure that the cage is fully inserted into the cavities of the filter. (Fig. 1)
3. Apply a bead of provided K&N® sealing grease, making sure that you lubricate the entire bump seal on the top side of the air filter. (Fig 2)
4. Slide the K&N® air filter and cage assembly into the air box. Make sure that the filter is properly seated and that the metal spring clips are engaging the filters plastic cage.
5. Close the access door of the air box.
6. To remove the filter from the air box, gently pull on the filter so that it clears the air box and then pull the filter and cage up as one unit. (Fig. 3)

NOTE: Appearance of the air box may vary depending on vehicle model. Do not force the air filter out or use any tools or damage to the air filter housing and or air filter assembly could result.

THESE INSTRUCTIONS MUST BE MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1

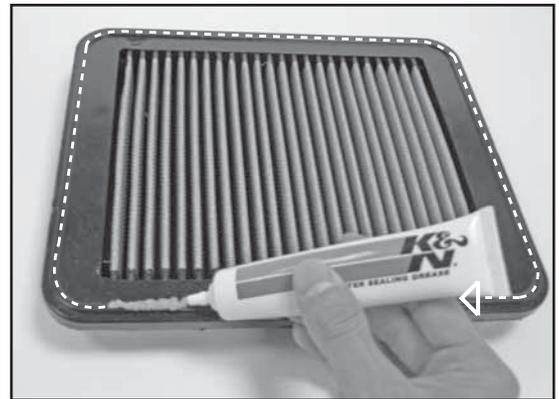


Fig. 2



Fig. 3