



INSTALLATION INSTRUCTIONS

Part Number 59-2010

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter/flame arrestor that money can buy. With proper care, this filter can last many seasons. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

INSTALLATION

1. Remove the hose clamp from the air silencer hose at the plenum.
2. Remove the bracket holding the air silencer to the hull.
Note: The air silencer will no longer be used.
3. Remove the stabilizer bracket from the head and the plenum.
4. Remove the plenum cover from the base.
5. Remove the stock flame arrestor element.
Note: The flame arrestor element will not longer be used.
6. Reinstall the plenum cover and stabilizer bracket.
7. Install the K&N Flame Arrestor onto the end of the plenum.
Note: Angle the K&N Flame Arrestor for the best clearance.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

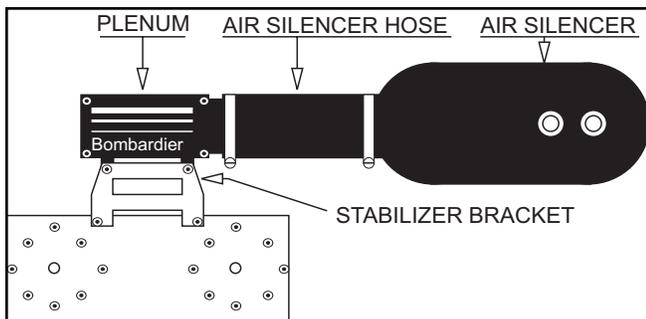


Fig. 1

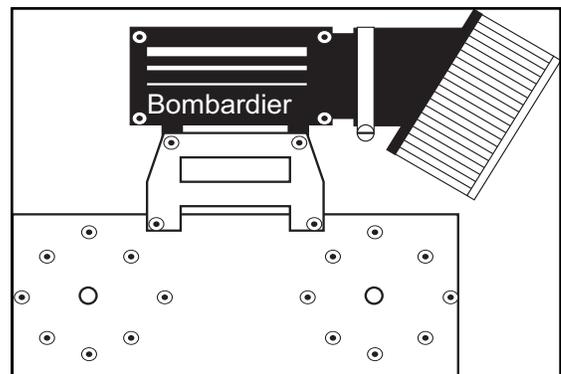


Fig. 2