



# INSTALLATION INSTRUCTIONS

## Part Number BM-1205

**This filter fits:** SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

### INSTALLATION

1. Remove the air box clips and remove the stock air filter. (Fig. 1)
2. Carefully clean the air filter sealing surface.
3. Apply a thin layer of the provided K&N Sealing Grease to the sealing surface of the K&N Filtercharger®. (Fig. 2)
4. Install the K&N Filtercharger® into the intake snorkel. (Fig. 3)
5. Install the intake snorkel and K&N Filtercharger® onto the air box. (Fig. 4)  
**Note:** Make sure the K&N Filtercharger® is completely seated onto the sealing surface of the air box.
6. Reinsert the air box clips to fasten the snorkel to the air box. (Fig. 5)

### REMOVAL

7. After the clips have been removed use a screwdriver or flat tool to gently push the K&N Filtercharger® towards the snorkel before sliding the snorkel off of the air box. (Fig. 6)

**Note:** The above steps will need to be repeated on models with two air boxes.

**THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.**



Fig. 1




Fig. 2



Fig. 3



Fig. 4



Fig. 5

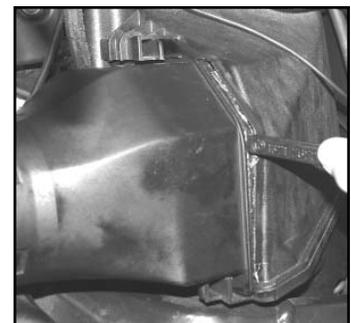


Fig. 6