



INSTALLATION INSTRUCTIONS

Part Number HA-4504

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter can last many seasons. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

INSTALLATION

1. Remove the stock air filter and inner cage.
Note: The inner cage will not be used with the K&N Filtercharger®.
2. Clean all sealing surfaces in the air box.
3. Install the stock air filter clamp onto the K&N Filtercharger®. Do not tighten at this time.
4. Install the K&N Filtercharger® with the welded end of the bracket facing up. (Fig. 1) Do not tighten clamp at this time.
5. Install the provided spacer between the stand-off in the air box and the bracket of the air filter. (Fig. 2)
Note: The spacer **MUST** be used otherwise damage to the top plate can occur.
6. Install the provided washer and screw and tighten. (Fig. 3)
WARNING: Do not over tighten otherwise the standoff can be damaged.
7. Tighten the stock air filter clamp. (Fig. 4)
8. Reinstall the stock air box lid.

Available to purchase separately

Precharger Wrap; HA-4504PR

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.




Fig. 1

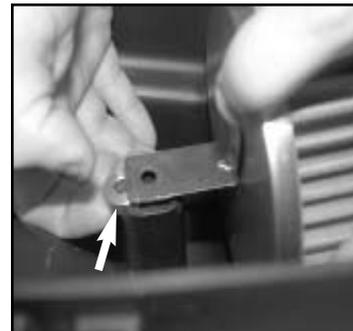


Fig. 2

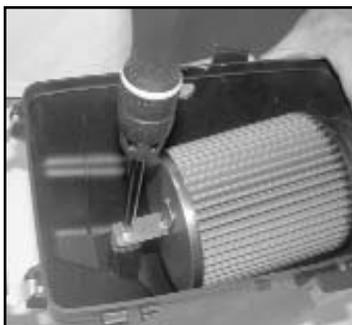


Fig. 3



Fig. 4