



QUALITY... PLAIN & SIMPLE®

**Chromed Billet Oval LED Taillights Installation Instructions
Part # TL-1910 and TL-1911**

Chromed Billet Oval LED Taillights Installation Instructions

Part # TL-1910 and TL-1911

Building American Quality... With A Lifetime Warranty!™

10924 Murdock Dr. • Knoxville, TN 37932

TOLL FREE 1-877-469-7440 • (865) 966-2269 • FAX (865) 671-1999 • tech@lokar.com • www.lokar.com

STOP! Please read all installation instructions before beginning installation. Call Lokar for any questions or uncertainties during installation.

WARNING: Disconnect battery before beginning installation. Make sure vehicle is in Park. Be sure that the vehicle's parking brake is set and scotched to avoid movement of the vehicle.

IMPORTANT: Before beginning any cutting, be sure there is adequate clearance behind the body panel for the installation of the taillight.

Chromed Billet Oval LED Taillights Installation

NOTE: The taillight is shipped fully assembled for Quality Control. **DO NOT REMOVE** the back plate as parts may be lost.

Step 1: Using the provided template, layout and cut an opening in the desired location. **See Photo 1**

Note: It is crucial that the opening not be oversized to ensure proper fit.

Step 2: Insert the taillight carefully through the opening. **See Photo 2**

Step 3: Install the oval washer around the taillight. **See Photo 3**

Step 4: Install the two retaining brackets using the supplied 6-32 socket head allen bolts. **See Photo 4**

Step 5: Install the supplied 8-32 set screws through the retaining brackets and hand tighten against the oval washer. **See Photo 5**

Step 6: Using a cross pattern, gently tighten the 8-32 set screws until the taillight has been drawn to the body panel. **Warning: Do not over tighten to avoid damage to paint.**

Step 7: Install supplied 8-32 jam nuts onto set screws and tighten. **See Photo 6**

Step 8: Wire taillights into 12 volt system.

Note: Due to low current draw of LED lights, some vehicles may require a "No Load Flasher". Available from Lokar, Part No. TL-1912

- GREEN** = Brake wire (turn signals controlled by turn signal switch)
- YELLOW** = Taillight wire (running lights)
- BLACK** = Connect to a GOOD chassis ground

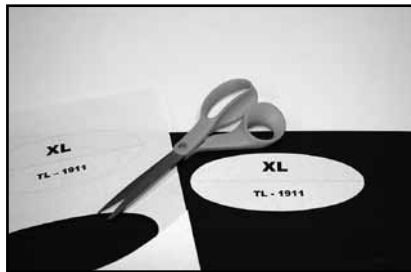


Photo 1



Photo 2



Photo 3

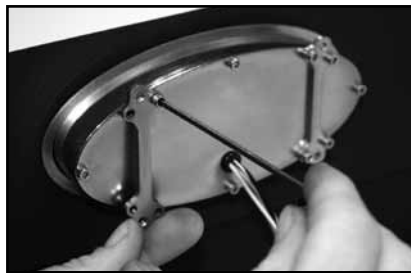


Photo 4

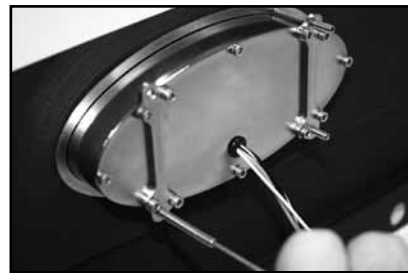


Photo 5



Photo 6