

INSTRUCTIONS

910-11598

910-11597


©Speedway Motors, Inc. 2017

STROMBERG 97 MASTER AND STANDARD REBUILD KIT

**PLEASE READ INSTRUCTIONS COMPLETELY BEFORE
STARTING YOUR INSTALLATION**

PARTS LIST STROMBERG MODEL EE-1 CARBURETOR

Ref. No.	Description	Included in 11598	Included in 11597
1	Gasket- Flange (Asbestos) 910-11050	x	x
2	Rod Assy – Accelerator Pump* (Long)910-11599 (Short)560-0001		
3	Fulcrum – Air Shuttie Lever		
4	Lever- Choke		
5	Spring – Choke Valve Tension		
6	Pin – Cotter, Accelerator Pump Lever		
7	Fulcrum – Accelerator Pump Lever		
8	Lever – Accelerator Pump		
9	Spring – Accelerator Pump Lever 910-11546		
10	Screw – Upper to Lower Body		
11	Lock washer – Air Horn to Main Body		
12	Gasket – Upper Body	x	x
13	Pump Assy. – Accelerator & Plunger	x	x
14	Gasket – Pump Felt	x	x
15	Washer _ Pump Plunger	x	x
16	Spring – Pump Plunger, Upper	x	x
17	Retainer – Accelerator Pump & Plunger	x	x
18	Seat – Pump Return Spring	x	x
19	Spring – Accelerator Pump Return	x	x
20	Pin – Float Hinge		
21	Float Assembly 910-11549		
22	Needle & Seat Assembly	x	
23	Seat – Needle	x	x
24	Gasket – Needle Seat 910-11543	x	x
25	Valve – Needle	x	x
26	Jet Assy. – Idling	x	
27	Jet Assy. – Power	x	
28	Gasket – Power Jet	x	
29	Plug – Metering Jet		
30	Gasket – Drain Plug (3) 910-11542		
31	Plug – Drain		
32	Valve Assy. – Accelerator Pump Check	x	
33	Screw – Lower Body to Throttle Body 910-11560		
34	Lock washer – Throttle Barrel	x	x
35	Gasket – Throttle Body	x	x
	Gauge – Float Level (Not Illustrated)		

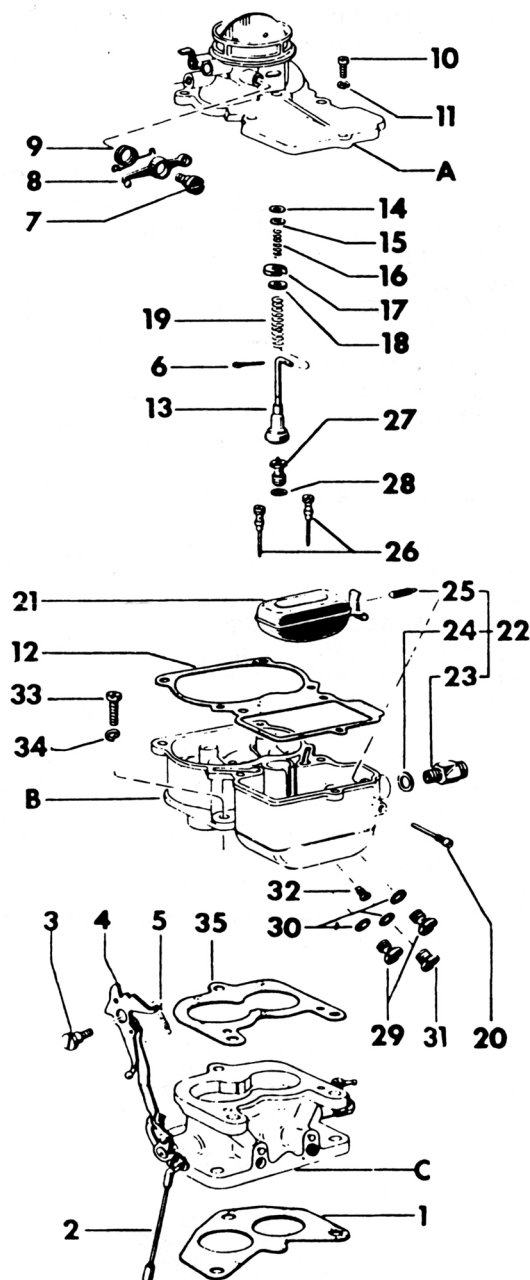

Speedway Motors Inc,
P.O. Box 81906 Lincoln, NE 68501
(402) 323-3200
www.speedwaymotors.com



Numbers used in disassembly and reassembly procedure are reference numbers on the illustration on the reverse side.

This economy kit is intended for use on carburetors that need cleaning and require minor replacement of parts, but otherwise are in satisfactory mechanical condition. The economy kit is not intended for the use on carburetors that are worn to the extent that replacement of the parts contained in the kit will not enable the carburetor to deliver proper performance and economy.

1. DISASSEMBLY.

Remove carburetor from the engine and lift off flange gasket (1). Disconnect pump rod (2) at ball sockets. Remove air shuttle lever screw (3) and disengage choke lever (4) by disconnecting choke valve tension spring (5). Remove parts (6) through (9) in numerical order.

Remove five cover screws (10) and their lock washers (11) and slide cover A off over pump plunger (13). Lift off body gasket (12). Remove parts (13) through (32) in numerical order.

Remove the three throttle body screws (33) and their lock washers (34) and separate body B from flange C. Lift off throttle body gasket (35).

2. CLEANING

Cleaning must be accomplished with carburetor retor taken apart. Soak carburetor parts long enough to soften and remove all foreign material, Use (1), a regular carburetor cleaning solvent; (2), lacquer thinner; or (3), denatured alcohol. Use a small brush to aid in cleaning parts if necessary. Make certain carburetor bore is free of all hard carbon deposits. Do not boil carburetor in alkaline solution as it destroys protective coatings on casting. Blow out all passages with dry compressed air and check carefully.

3. REASSEMBLY

Install parts in body B in the order named: (30), (31), (29), (28), (27), (26), (25), (24) and (23). Insert new throttle body gasket (35) and attach body B to flange C with three throttle body screws (33) and their lock washers (34). Install float (21) with large pin (20). Gauge float to exact specification to produce correct gasoline level in bowl. (see illustration). Adjustments made by bending float tip, which contacts bottom of needle.

Assemble pump parts in the order named: (13), (19), (18), (17), (16), (15) and (14). Insert in body, taking care not to wrinkle pump leather.

Place new body gasket (12) over body B. Slide cover A over end of pump plunger (13) and fasten to body with five cover screws (10) and their lock washers (11).

Install parts on cover A in the following order (9), (8), (7), (6), (5), (4) and (3).



Attach pump link (2) at ball sockets. Place flange gasket (1) in place and attach carburetor.

4. IDLE ADJUSTMENT

Adjust throttle stop screw (1) to crack throttle valves open slightly. Start engine and adjust idle adjusting needles (2) until engine idles smoothly.

Regulate idle speed by readjusting throttle stop screw (1). Engine should idle at approximately 400 RPM.

Readjustment of the throttle stop screw (1) may call for a slight readjustment of idle adjusting needles (2). If smooth idle can not be obtained by adjusting needles (2), there is something wrong with the carburetor or other parts of the engine which must be located and corrected.

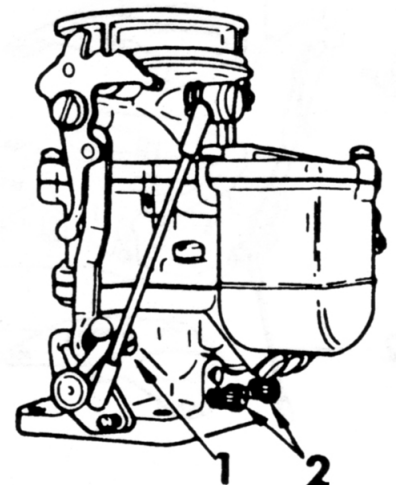

IMPORTANT

DISCLAIMER In an effort to offer our customers the low prices, quick service and great value, Speedway Motors reserves the right to change suppliers, specifications, colors, prices, materials. Each of the previous items is subject to change without notice. Speedway is not responsible for any typographical errors or misinterpretations. Quantities are limited on some items.

WARRANTY DISCLAIMER The purchaser understands and recognizes that racing parts, specialized street rod equipment, and all parts and services sold by Speedway Motors, Inc. are exposed to many and varied conditions due to the manner in which they are installed and used. Speedway Motors, Inc. makes no warranties, either express or implied, including any warranty of merchantability or fitness for a particular purpose other than those contained in its current catalog with respect to the goods identified on the face of the invoice. There is no warranty expressed or implied as to whether the goods sold hereby will protect purchaser or ultimate user of such goods from injury or death. Speedway Motors assumes no liability after this period.

DAMAGE CLAIMS Always inspect your package upon delivery. Inspect all packages in the presence of the delivery driver. The driver must note any damage. Ask the driver the Carrier's procedures for handling damage claims. You must hold the original box, packing material and damaged merchandise for inspection or the carrier will not honor the claim. Notify Speedway Motors customer service department for instructions on returning damaged goods. Speedway is not responsible if no notification is given within 5 days of receipt.

SHORTAGES Always check the contents of your delivery to insure all the parts that you ordered were received. Please read the invoice. Double check all packing materials, small items may be wrapped inside with these products. Shortages may occur from damage to the box, so save all packing materials. Inspect the box for holes that would allow parts to fall out. If you are missing any item(s) be sure to check your invoice for back orders or canceled items before calling the customer service department. If Speedway has to split a shipment into multiple boxes, packages may be delivered on different days. You need to contact the customer service department within 5 days of delivery to assure the prompt replacement. Speedway Motors assumes no liability after this period.

REFUSALS All refused COD customers will be billed a 15% restocking charge plus freight to and from the destination! If you have questions please contact Speedway's customer service department.

WARRANTY CLAIMS If an item has a manufacturer's warranty as being free from defects we will exchange only. If the item has been used and you are requesting warranty work, this may take up to 30 days as warranty work is done by the manufacturer NOT Speedway Motors. If you have any questions please contact customer service.

RETURNS Speedway wants you to be satisfied with your purchase. If within 30 days after you receive your shipment you are not satisfied, you may return the item for refund or exchange. All exchanged or returned merchandise must be in original factory condition with no modifications or alterations. Returned merchandise must include all packaging materials, warranty cards, manuals, and accessories. If the items being returned need to be repackaged there will be a re-packing charge. Re-pack the item in a sturdy box and include a copy of your invoice and complete the form on the back of the invoice. You must ship orders back **PRE-PAID. WE DO NOT ACCEPT COD SHIPMENTS.** All exchanges need to have reshipping charges included. Items that are returned after 30 days are subject to 15% restocking charges. All fiberglass returned will have 15% restocking charge. No returns on electrical parts, video tapes, and books. Absolutely no returns on special order or close out merchandise.

FREE CATALOGS Speedway Motors offers FREE catalogs for Race, Street, Sprint and Midget, Sport Compact and Pedal Car restoration.

****Some items are not legal for sale or use in California on pollution controlled motor vehicles. These items are legal in California for racing vehicles only which may never be used upon a highway.**

Speedway Motors Inc,
P.O. Box 81906 Lincoln, NE 68501
(402) 323-3200
www.speedwaymotors.com



©Speedway Motors, Inc. 2017