

INSTRUCTIONS

913-81102

CAM BEARING DRIVER

NOTE: As a matter of personal preference bearings can be replaced from front to rear, or from rear to front. Bearing size positions are numbered from front to rear. Make certain that bearings are in their proper location and that oil holes are aligned with groove in block, per manufacturers specifications, or engine damage may result.

REMOVE OLD CAM BEARINGS.

1. Insert the o-ring side of the tapered alignment spool into the front cam bearing.
2. Carefully slide drive arbor through the alignment spool toward rear of block.
3. Insert the o-ring side of drive spool into the #5 cam bearing.
4. Engage drive arbor into drive spool, strike drive cap end of drive arbor to remove the rear cam bearing and Welch plug.
5. Repeat for bearing #'s 4, 3, and 2.
6. Remove alignment spool & drive arbor from front cam bearing and position tapered end of alignment spool into the rear cam bearing bore of block.
7. Engage drive arbor & drive spool into bearing #1, and drive it out of front of block.



INSTALL NEW CAM BEARINGS

IMPORTANT: Thoroughly clean block of any debris. Ensure cam bore surfaces are free of nicks, scratches, or other damage. Lightly lubricate bearing bores and o-rings with oil.

1. Position tapered end of alignment spool into the rear cam bearing bore of block.
2. Insert drive arbor through alignment spool toward the front of the block.
3. Install #1 bearing on drive spool, position drive spool (with bearing) into cam tunnel between 1st and 2nd bulkhead, engage drive arbor into drive spool.
4. Maintain pressure on tapered alignment spool to keep it centered in rear bearing bore, position oil hole of bearing in proper orientation and gently tap drive cap end of drive arbor with a soft mallet until bearing is centered in bulkhead (oil hole aligned).

CAUTION: Do not use excessive force. If it feels tight stop and double check bearing dimensions and alignment before proceeding.

5. Insert the o-ring side of the tapered alignment spool into the front cam bearing.
6. Carefully slide drive arbor through the alignment spool toward rear of block.
7. Install #5 bearing on drive spool, position drive spool (with bearing) into cam tunnel between 4th and 5th bulkhead, engage drive arbor into drive spool. Position bearing and gently tap into place until oil hole is properly aligned.
8. Repeat previous step for bearing #'s 4, 3, and 2.

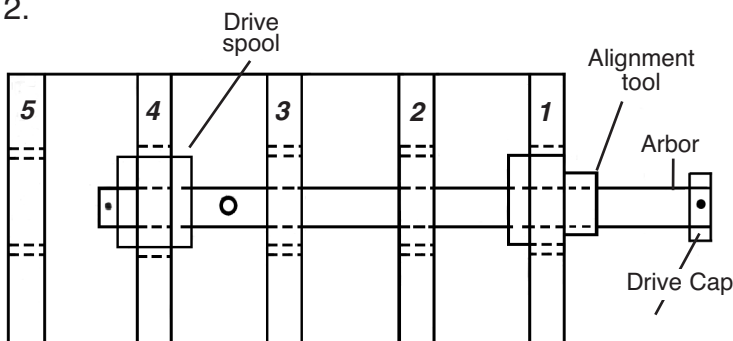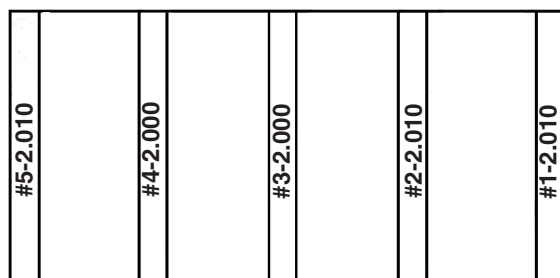

IMPORTANT

DISCLAIMER In an effort to offer our customers the low prices, quick service and great value, Speedway Motors reserves the right to change suppliers, specifications, colors, prices, materials. Each of the previous items is subject to change without notice. Speedway is not responsible for any typographical errors or misinterpretations. Quantities are limited on some items.

WARRANTY DISCLAIMER The purchaser understands and recognizes that racing parts, specialized street rod equipment, and all parts and services sold by Speedway Motors, Inc. are exposed to many and varied conditions due to the manner in which they are installed and used. Speedway Motors, Inc. makes no warranties, either express or implied, including any warranty of merchantability or fitness for a particular purpose other than those contained in its current catalog with respect to the goods identified on the face of the invoice. There is no warranty expressed or implied as to whether the goods sold hereby will protect purchaser or ultimate user of such goods from injury or death. Speedway Motors assumes no liability after this period.

DAMAGE CLAIMS Always inspect your package upon delivery. Inspect all packages in the presence of the delivery driver. The driver must note any damage. Ask the driver the Carrier's procedures for handling damage claims. You must hold the original box, packing material and damaged merchandise for inspection or the carrier will not honor the claim. Notify Speedway Motors customer service department for instructions on returning damaged goods. Speedway is not responsible if no notification is given within 5 days of receipt.

SHORTAGES Always check the contents of your delivery to insure all the parts that you ordered were received. Please read the invoice. Double check all packing materials, small items may be wrapped inside with these products. Shortages may occur from damage to the box, so save all packing materials. Inspect the box for holes that would allow parts to fall out. If you are missing any item(s) be sure to check your invoice for back orders or canceled items before calling the customer service department. If Speedway has to split a shipment into multiple boxes, packages may be delivered on different days. You need to contact the customer service department within 5 days of delivery to assure the prompt replacement. Speedway Motors assumes no liability after this period.

REFUSALS All refused COD customers will be billed a 15% restocking charge plus freight to and from the destination! If you have questions please contact Speedway's customer service department.

WARRANTY CLAIMS If an item has a manufacturer's warranty as being free from defects we will exchange only. If the item has been used and you are requesting warranty work, this may take up to 30 days as warranty work is done by the manufacturer NOT Speedway Motors. If you have any questions please contact customer service.

RETURNS Speedway wants you to be satisfied with your purchase. If within 30 days after you receive your shipment you are not satisfied, you may return the item for refund or exchange. All exchanged or returned merchandise must be in original factory condition with no modifications or alterations. Returned merchandise must include all packaging materials, warranty cards, manuals, and accessories. If the items being returned need to be repackaged there will be a re-packing charge. Re-pack the item in a sturdy box and include a copy of your invoice and complete the form on the back of the invoice. You must ship orders back **PRE-PAID. WE DO NOT ACCEPT COD SHIPMENTS.** All exchanges need to have reshipping charges included. Items that are returned after 30 days are subject to 15% restocking charges. All fiberglass returned will have 15% restocking charge. No returns on electrical parts, video tapes, and books. Absolutely no returns on special order or close out merchandise.

FREE CATALOGS Speedway Motors offers FREE catalogs for Race, Street, Sprint and Midget, Sport Compact and Pedal Car restoration.

****Some items are not legal for sale or use in California on pollution controlled motor vehicles. These items are legal in California for racing vehicles only which may never be used upon a highway.**

Speedway Motors Inc., P.O. Box 81906
Lincoln, NE 68501 (402) 323-3200
www.speedwaymotors.com



©Speedway Motors, Inc. 2007