




EDELBROCK NITROUS SYSTEMS
 VICTOR SERIES WITH E2 FOR 4-CYLINDER JET MAP
 CATALOG #71845
 INSTALLATION INSTRUCTIONS

Please read both your DIRECT PORT INSTRUCTION MANUAL and this JET MAP insert before installing your Edelbrock Nitrous System. If you have any questions or comments, please feel free to contact our Technical Hotline at: 1-800-416-8628 from 7a.m.-5p.m., Monday through Friday, Pacific Time or e-mail us at Edelbrock@Edelbrock.com.

BILL OF MATERIALS

Qty.	Description	Qty.	Description
❑ 1	Performer Nitrous Solenoid	❑ 4	Red Tube Nuts
❑ 1	Performer Fuel Solenoid	❑ 8	Compression Fittings
❑ 4	Edelbrock E2 Nozzles	❑ 2	Distribution Blocks
❑ 8	3/16" Tubing	❑ 2	90° Union Fittings
❑ 8	Tube Sleeves	❑ 1	4AN Nitrous Filter Fitting
❑ 4	Blue Tube Nuts	❑ 1	4AN Red Fitting
		❑ 28	Various Jets

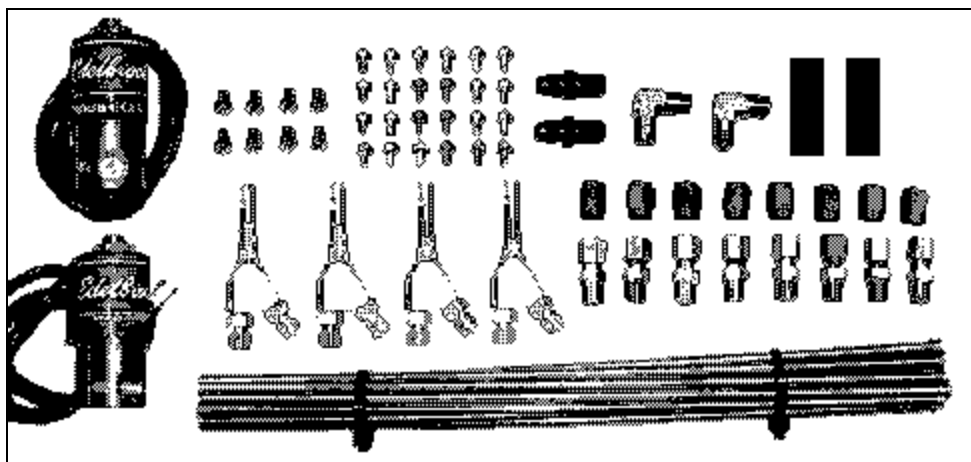

Jet Map

Approx. HP Gain	Nitrous Jet	Fuel Jet	Sugg. Timing Retard
50 HP	16	16	0°
75 HP	20	18	0°-1°
100 HP	24	20	1°-3°
125 HP	27	22	2°-4°
150 HP	32	26	3°-5°

This jet map is based on a nitrous system with a flowing fuel pressure of 6.0-6.5 PSI. Any variations different that 6.0-6.5 will change your jet map and potentially damage your engine. We highly recommend using the *Edelbrock Flow Test Tool (Catalog #76506)* to set your flowing fuel pressure.

Edelbrock Corporation • 2700 California St. • Torrance • CA 90503
 Tech Line: 800-416-8628
 Office: 310-781-2222
 E-Mail: Edelbrock@Edelbrock.com