



Installation Instructions
Part Number 250-634
2010-15 Chevrolet Camaro
6.2L V-8



Parts List

#1	Poweraid Spacer	x1
#2	6mmx50mm Bolt	x4
#3	6mm Flat Washer	x4
#4	Fiber Gasket	x1

Tools Required For Installation

5/16", 10mm Socket
 Ratchet and Extension

Thank you for purchasing the Poweraid Throttle Body Spacer. Please read the instruction manual carefully before proceeding with the installation. Contact AIRAID @ (800) 498-6951 8:00 AM - 5:00 PM MST Weekdays for questions regarding fit or instructions that are not clear to you. Your Poweraid Throttle Body Spacer was carefully inspected and packaged. Check that no parts are missing, or were damaged during shipping. If any parts are missing, please contact AIRAID.



1. Disconnect the negative battery cable!


Remove the oil fill cap and set it aside.
 Lift straight up on the engine beauty cover and set it aside.
 Reinstall the oil fill cap after the beauty cover has been removed to prevent any foreign material from entering the crankcase.



2. Disconnect the breather hose elbow by pulling it straight away from the intake tube. It is only held in place by an O-ring. Loosen the two hose clamps that secure the intake tube to the throttlebody, and the air box lid. Remove the air intake tube.



3. Remove the four bolts that secure the throttlebody to the intake manifold.

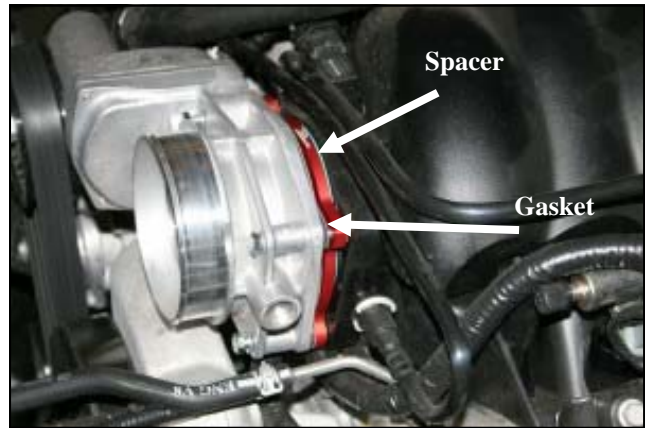

4. Install the Poweraid Spacer between the throttlebody and the intake manifold with the supplied gasket next to the throttlebody as shown. *Note: Poweraid spacer must be installed with bore protruding into intake manifold away from throttle body. Incorrect installation will hinder performance. Reference picture below for spacer orientation.



5. Install the provided bolts and washers thru the throttlebody, gasket, and Poweraid Spacer and tighten to the manufacturer's specifications.



6. Reinstall the intake tube, tighten the two hose clamps, and reconnect the crankcase breather tube. Reinstall the beauty cover, and oil cap in the reverse order that they were removed.
Re-connect the negative battery cable!

The sound of power...The "whistle" means its working!



Example of proper spacer installation. Spacer must protrude into intake manifold and away from throttle body.



Contact your nearest Airaid dealer for an Airaid Intake System for your car, truck or SUV.

Revision 4.21.16

Airaid. 1815 West Crest Lane. Phoenix AZ 85027 (800) 498-6951 AiraidInfo@airaid.com www.airaid.com