



NOTE: Gauge bezel can be painted using a plastic safe paint.

1. Remove stock gauge bezel.
2. **Acura Integra** - Drill $\frac{7}{64}$ " hole in the plastic cross member. Install aluminum bracket (Fig. 1). Bracket stud should align with hole in lower center of gauge bezel.
Honda Civic - Remove bottom center screw from gauge cluster housing. Reinstall screw and supplied aluminum bracket (Fig. 2).
3. Install gauges in new gauge bezel (gauges are press fit).
4. Install new gauge bezel using original screws in the top.
5. Attach bottom of bezel to aluminum bracket using supplied hardware. (See figure 1 for Acura, or figure 2 for Honda)
6. Run gauge wiring out through the firewall.

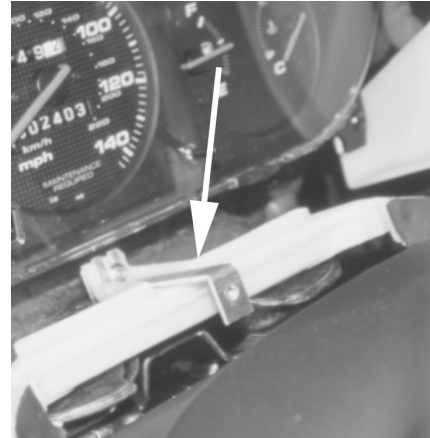


Fig. 2 - Bracket installed on Honda Civic




Fig. 1 - Bracket installation for Acura Integra

SERVICE

For service send your product in a well packed shipping carton to the address below. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. Normal repairs take approximately ten (10) working days. If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

Auto Meter Gauge Works Three Limited year Warranty

Gauge Works warrants to the consumer that all Auto Meter Gauge Works products will be free from defects in material and workmanship. Products that fail will be repaired or replaced at Auto Meter Gauge Works' option to the consumer, when determined by Auto Meter Gauge Works that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter Gauge Works Product and the necessary labor done by Auto Meter Gauge Works to effect the repair or replacement of the Auto Meter Gauge Works product. In no event shall this warranty exceed the original purchase price of the Auto Meter Gauge Works product nor shall Auto Meter Gauge Works be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter Gauge Works must be transportation prepaid and accompanied with proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. Improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Gauge Works disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter Gauge Works. This warranty is made solely by Gauge Works with Auto Meter being the agent to contact for warranty claims. If the partnership between Auto Meter and Gauge Works dissolves, then all warranty adjustments will be covered by the Gauge Works Co.

FOR SERVICE CONTACT: AUTO METER PRODUCTS Inc. 413 W. Elm St., Sycamore, IL 60178 USA (815) 899-0801 or
Email us at service@autometer.com

© 2002 Auto Meter Products, Inc.

2650-940D 1/21/02



NOTE: Gauge bezel can be painted using a plastic safe paint.

1. Remove stock gauge bezel.
2. **Acura Integra** - Drill $\frac{7}{64}$ " hole in the plastic cross member. Install aluminum bracket (Fig. 1). Bracket stud should align with hole in lower center of gauge bezel.
Honda Civic - Remove bottom center screw from gauge cluster housing. Reinstall screw and supplied aluminum bracket (Fig. 2).
3. Install gauges in new gauge bezel (gauges are press fit).
4. Install new gauge bezel using original screws in the top.
5. Attach bottom of bezel to aluminum bracket using supplied hardware. (See figure 1 for Acura, or figure 2 for Honda)
6. Run gauge wiring out through the firewall.

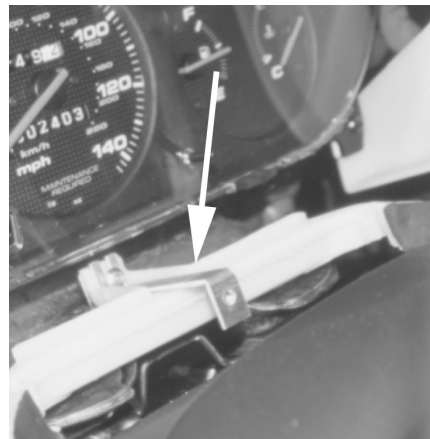


Fig. 2 - Bracket installed on Honda Civic

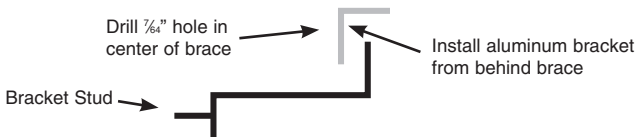


Fig. 1 - Bracket installation for Acura Integra

SERVICE

For service send your product in a well packed shipping carton to the address below. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. Normal repairs take approximately ten (10) working days. If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

Auto Meter Gauge Works Three Limited year Warranty

Gauge Works warrants to the consumer that all Auto Meter Gauge Works products will be free from defects in material and workmanship. Products that fail will be repaired or replaced at Auto Meter Gauge Works' option to the consumer, when determined by Auto Meter Gauge Works that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter Gauge Works Product and the necessary labor done by Auto Meter Gauge Works to effect the repair or replacement of the Auto Meter Gauge Works product. In no event shall this warranty exceed the original purchase price of the Auto Meter Gauge Works product nor shall Auto Meter Gauge Works be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter Gauge Works must be transportation prepaid and accompanied with proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. Improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Gauge Works disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter Gauge Works. This warranty is made solely by Gauge Works with Auto Meter being the agent to contact for warranty claims. If the partnership between Auto Meter and Gauge Works dissolves, then all warranty adjustments will be covered by the Gauge Works Co.

FOR SERVICE CONTACT: AUTO METER PRODUCTS Inc. 413 W. Elm St., Sycamore, IL 60178 USA (815) 899-0801 or
Email us at service@autometer.com

© 2002 Auto Meter Products, Inc.

2650-940D 1/21/02