

HEADER INSTALLATION INSTRUCTIONS D303Y, D303Y-DP & D303Y-SP APPLICATION

1968-1987 Chevrolet/GMC 1/2, 3/4 & 1 Ton 2&4 WD Pickup
1975-1991 Chevrolet P30 Motorhome



WARNING: These headers are legal for Off Highway use (except in California or states that have adopted California emission standards) or Racing use (which may never be used on a Highway), or for use on pre emission controlled motor vehicles/motor vehicle engines (pre 1966 domestic vehicles certified to California standards, pre 1968 domestic vehicles certified to Federal standards and all pre 1968 Foreign vehicles) **Only**.

PerTronix® thanks you for choosing **DOUG'S HEADERS**, the best fitting, highest quality header on the market. In order to realize the full potential of our good fit, please read and understand these instructions completely prior to starting work.

CHECK TO MAKE SURE YOU RECEIVED THE PROPER PARTS FOR YOUR APPLICATION. THE HEADER NUMBER WILL BE STAMPED ON THE ENGINE FLANGE. IF YOU ARE UNSURE YOU HAVE RECEIVED THE PROPER PARTS CALL BEFORE YOU START WORK.

BE SURE TO WORK SAFE! WHENEVER YOU WORK UNDER THE VEHICLE BE SURE THAT IT IS LOCATED ON LEVEL, SOLID GROUND AND IS SUPPORTED BY ADEQUATE SAFETY STANDS!

REMEMBER: HOT ASPHALT WILL NOT SUPPORT MOST JACK STANDS!

Many factors affect the installation of headers, some of which are broken or aftermarket motor mounts, accidents that impact the configuration of the frame, and/or the installation of different engines or aftermarket cylinder heads. Most installations require some welding. If you are uncomfortable with welding operations, we recommend that you contact a professional exhaust system specialist to install your new headers.

Attention Customers breaking in new engines: Due to the extreme heat generated during the break-in process, the appearance of the ceramic coating may be altered in certain areas. The protection characteristics and thermal barrier properties of the coating is never compromised. It is recommended that a cast iron manifold or old set of headers be used for this process.

Notice: The coating of these headers can be marred or scratched during installation. If the header needs to be returned and is damaged, you will be charged for recoat.

DISASSEMBLY


1. Disconnect the negative battery cable from the battery.
2. If a car lift is not available, raise the vehicle 2 feet or higher and support it with adequate safety stands. Make sure the vehicle is on a flat solid surface and is stable.
3. Apply penetrating oil to all nuts and bolts to be removed.
4. Remove and mark all spark plug wires and then remove all spark plugs.
NOTE: Grasp the spark plug boot, not the wire, and use a twisting motion while pulling the wire from the plug.
5. Disconnect the head pipes from the exhaust manifolds and remove the manifolds. Depending on your application, you may be required to remove the alternator, dipstick, clutch linkage, and/or oil filter. In some cases it may be necessary to remove the starter and power steering unit. Only remove what is necessary to allow the removal of the manifolds or the installation of the new headers.

6. Replace the spark plugs finger tight so debris will not get into the cylinders during the cleaning operation.
7. Remove any gasket material or any carbon deposits that remain on the head surface. The use of a gasket removal agent will ease the removal of any gasket material. We recommend the use of a sharp gasket scraper to remove the bulk of material and to finish the operation with a sanding block to provide a clean flat sealing surface.
8. After cleaning is complete remove the spark plugs again.
9. It may be necessary to cut the head pipes to allow room to install the headers. If you are installing a new exhaust system you may cut the head pipes any where you choose, but if you are using the existing exhaust you need to cut the head pipes in the proper location so that they will be able to be welded to the reducers supplied with your headers.

ASSEMBLY

1. Install the headers from the bottom of the vehicle. Slide the headers and gaskets into place and install a bolt at either end of the header to hold them in place and check for proper fit.
2. Check the passenger side header for clearance between the header primary tubes and the frame/engine perch. A minimum of ¼" is recommended. It may be necessary to remove a small amount of metal from the frame/engine perch for proper clearance.
3. Once you have determined proper fitment, install the gaskets. Install the gaskets using a **THIN** film of Ultra Hi-Temp Sensor Safe Silicone Sealer on both sides of the gasket. Install all of the header bolts and lock washers supplied and hand tighten. Tighten all the bolts evenly to a torque of approximately 35 Foot Pounds.
4. Install any accessories that were removed during the header installation.
5. **NOTE:** Some accessories require different brackets than stock and some require the addition of spacers between the bracket and header flange. An example would be on some Chevy applications the driver's side front bolt must use the original (factory) bolt and use the supplied spacer between the flange and the accessory bracket.
6. Install the reducers and determine the connection to the exhaust system.
7. Weld the reducers to the exhaust system and install them onto the headers utilizing the gaskets and bolts supplied.
8. Install the spark plugs and connect the wires to the proper plug. If the spark plugs have a lot of miles on them, now would be a good time to replace them. When you install the spark plugs, apply a **small** amount of anti-seize to the threads.
9. Reinstall other components that may have been removed (starter, power steering unit).
10. If applicable, attach the supplied Hot Air Pickup Tube as shown on Page 3, Figure 1.
11. Check to make sure that all the wiring, brake lines, hoses, etc. are clear of the headers or any exhaust component.
12. Connect the negative battery cable.

Figure 1

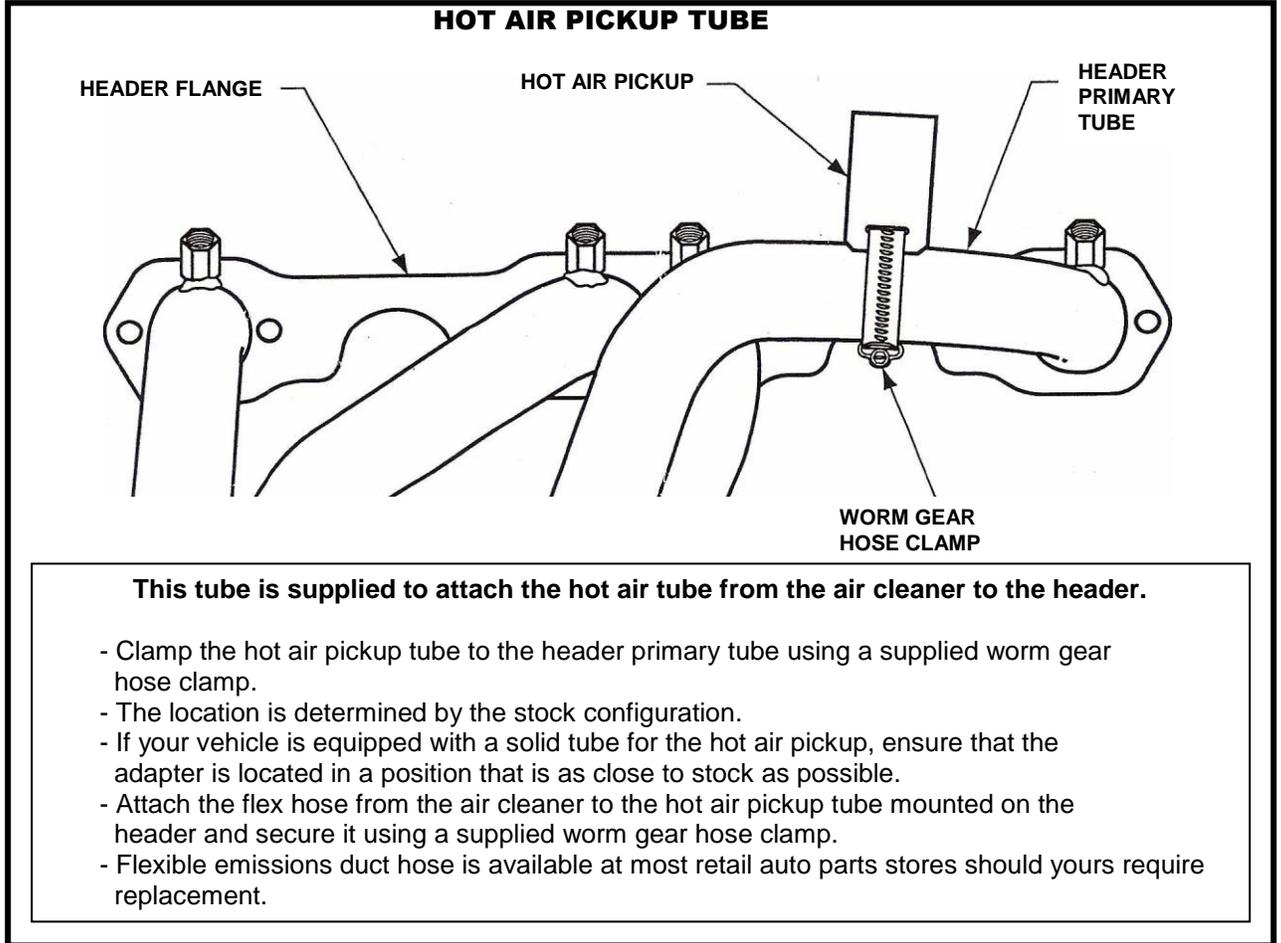

START THE ENGINE

Start the engine and allow it to warm up to operating temperature. Check for any unusual noises or exhaust leaks. If every thing is OK, stop the engine and tighten all bolts while the engine is still warm.

NOTE: Check the bolts periodically to make sure they have not loosened. Re-tighten after the first 500 miles and then again at 1000 miles.

IMPORTANT CHECK LIST

- **Be sure that all brake lines and fuel lines are clear of headers and/or connector pipes.**
- **All spark plug wires, battery cables, or other electrical components should be clear of headers and/or connector pipes.**
- **If dipstick tube was removed, make sure it is installed properly and that the dipstick has been replaced.**
- **Double-check the tightness of all bolts including brackets and accessories.**

PARTS LIST

Qty	Description
1	Left side header
1	Right side header
2	Header gaskets
2	2 1/2" reducers
2	2 1/2", 3 bolt collector gaskets
16	3/8"-16 x 1" header bolts
6	3/8"-16 x 1 1/4" hex head cap screws
6	3/8"-16 hex nut
22	3/8" lock-washers
1	Hot Air Pickup Tube
1	Clamp, Worm Gear, Stainless, #24